



LevelSys P FL

Technology For The Tank

PVC Continuous Level Sensor



If you use semi-aggressive liquids, key points of operation are:

- ✓Chemical compatibility
- ✓Tightness
- ✓Continuous measurement
- ✓Custom design vs cost
- ✓Reliability



„...Designed for demanding industrial applications...”



SPECIFIC

Designed for you

IDEATION



MEASURABLE

Impacts your business

DESIGNING



ACHIEVABLE

From idea to success

PROTOTYPING



RELEVANT

Serves your application

TESTING




TIME-BOUND

Built on time

MANUFACTURING



OEMSYS Sp. z o.o.
Fabryczna 1
34-600 Limanowa
Poland

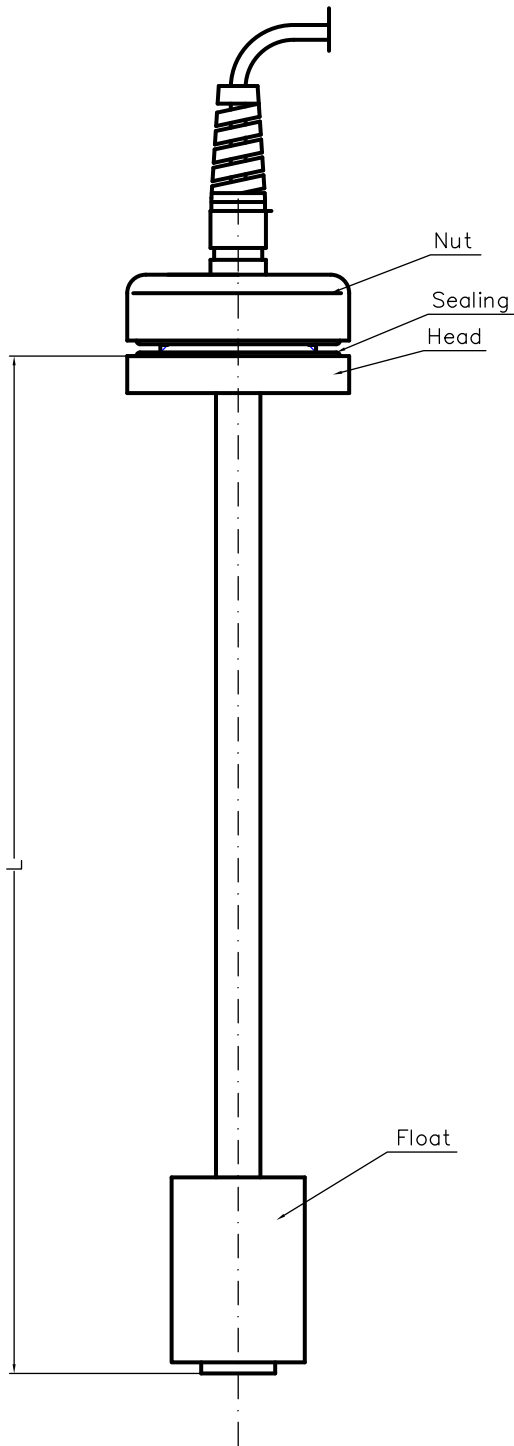

Technical specification	
Operating temperature	0..60°C
Housing material	PVC-U
Float material	PP
Max pressure	1 bar
Float diameter	30mm
Fluid minimum gravity	0,8
Supply voltage	24 VDC
Output	0..10V or 4..20mA
Accuracy	5 mm
Housing	IP 67
Electrical connection	Cable or customised
Alarms rating	10 W
Temperature sensor	Optional

LevelSys P FL	Legth	Cable length	High Level Alarm	Low Level Alarm	Output signal
	[mm]	[mm]	O-NO C-NC	O-NO C-NC	V-0..10 [V] A-4..20 [mA] S-Special

Consult factory for more options. **S-Special:** Please provide more details.

* NO/NC means output condition at NO LIQUID/Tank is empty

IDEA	DESIGN	PROTOTYPING	TESTING	MANUFACTURING
------	--------	-------------	---------	---------------

OEMSYS smart system solutions
OEMSYS Sp. z o.o.
 Fabryczna 1
 34-600 Limanowa
 Poland

DTS/0014 Rev.2