



# LevelSys S

Technology For The Pump  
PVC Level Switch



Control of the pump when filling the tank can be managed in a very simple way - the pump only needs to know when to start and when to stop. This information can be provided by a level switch that has:

- ✓Chemical compatibility
- ✓Tightness
- ✓Proper switching points
- ✓Custom design
- ✓Cost effective
- ✓Reliability



*„...filling process under control...”*



**SPECIFIC**

Designed for you

IDEATION



**MEASURABLE**

Impacts your business

DESIGNING



**ACHIEVABLE**

From idea to success

PROTOTYPING



**RELEVANT**

Serves your application

TESTING




**TIME-BOUND**

Built on time

MANUFACTURING



OEMSYS Sp. z o.o.  
Fabryczna 1  
34-600 Limanowa  
Poland

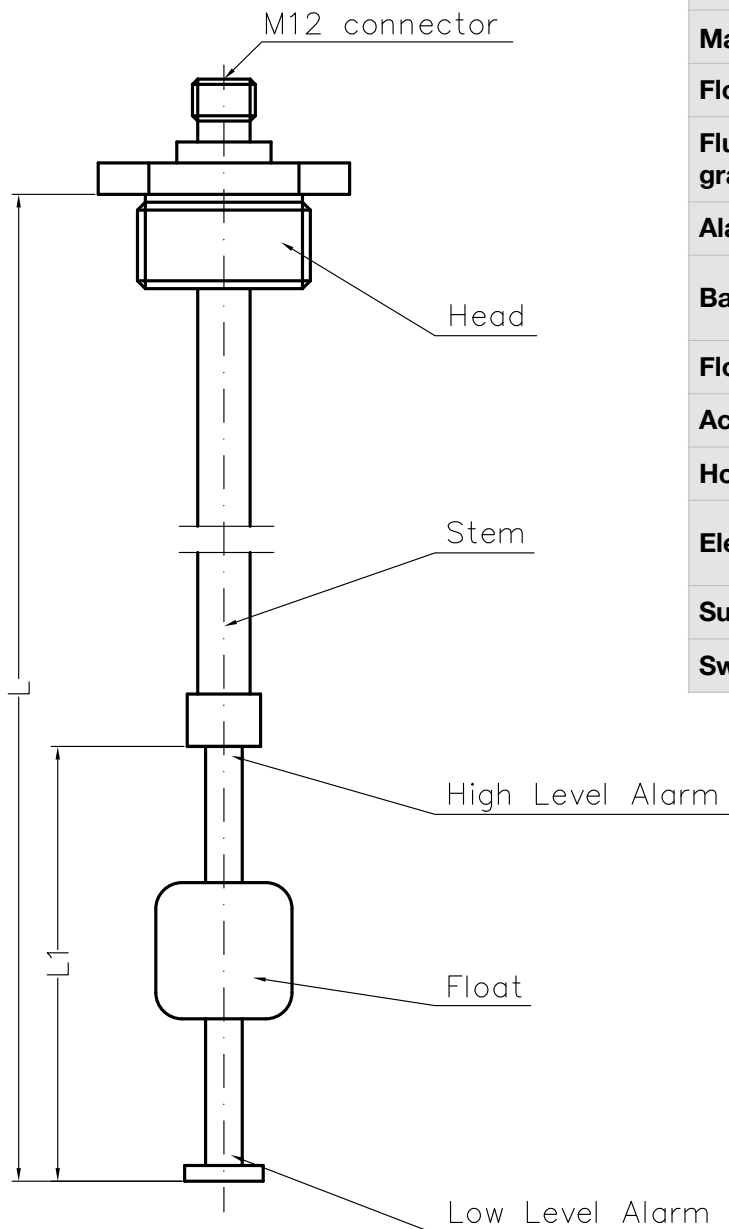

Technical specification	
Operating temperature	0..60°C
Max pressure	1 bar
Float diameter	22mm
Fluid minimum gravity	0,8
Alarm rating	10 W
Base material	PVC
Float material	PP or PVDF
Accuracy	5 mm
Housing	IP 67
Electrical connection	M12 4-P
Supply voltage	24 VDC
Switching current	100 mA

LevelSys S	Head	Length L	Length L1	High Level Alarm	Low Level Alarm	Float Material
	A-G1" S-Special	[mm]	[mm]	O-NO C-NC	O-NO C-NC	P-Polypropylene PV-PVDF

Consult factory for more options. **S-Special:** Please provide more details.

\* NO/NC means output condition at NO LIQUID/Tank is empty

IDEA	DESIGN	PROTOTYPING	TESTING	MANUFACTURING
------	--------	-------------	---------	---------------

**OEMSYS** smart system solutions  
**OEMSYS Sp. z o.o.**  
 Fabryczna 1  
 34-600 Limanowa  
 Poland

DTS/0015 Rev.1